




US 20170001721A1

(19) **United States**(12) **Patent Application Publication****Saika et al.**(10) **Pub. No.: US 2017/0001721 A1**(43) **Pub. Date: Jan. 5, 2017**(54) **COUPLING ASSEMBLY FOR A REMOVABLE PROPELLER****G05D 1/00** (2006.01)**B64C 39/02** (2006.01)(71) Applicant: **GoPro, Inc.**, San Mateo, CA (US)(52) **U.S. Cl.**CPC **B64C 27/48** (2013.01); **B64C 39/024**(2013.01); **B64C 27/08** (2013.01); **G05D****1/0011** (2013.01); **B64C 2201/042** (2013.01);**B64C 2201/165** (2013.01)(72) Inventors: **Noriaki Saika**, Foster City, CA (US);
William H. Tolbert, San Mateo, CA
(US); **Reza Yazdani**, San Francisco,
CA (US)(21) Appl. No.: **15/197,596**(22) Filed: **Jun. 29, 2016****Related U.S. Application Data**(60) Provisional application No. 62/187,205, filed on Jun.
30, 2015.**Publication Classification**(51) **Int. Cl.****B64C 27/48** (2006.01)**B64C 27/08** (2006.01)

(57)

ABSTRACT

Disclosed is an aerial vehicle. The aerial vehicle may include a removable battery. Various embodiments of removable battery assemblies include a pull-bar battery assembly, a latch battery assembly, and a lever battery assembly. The aerial vehicle may also include a propeller locking mechanism to which propellers may be removably coupled. The propeller locking mechanism may obviate the need for tools for coupling or decoupling propellers to the aerial vehicle. Vents in the arm of the aerial vehicle may provide an air pathway, providing convective cooling for the electronics aerial vehicle.

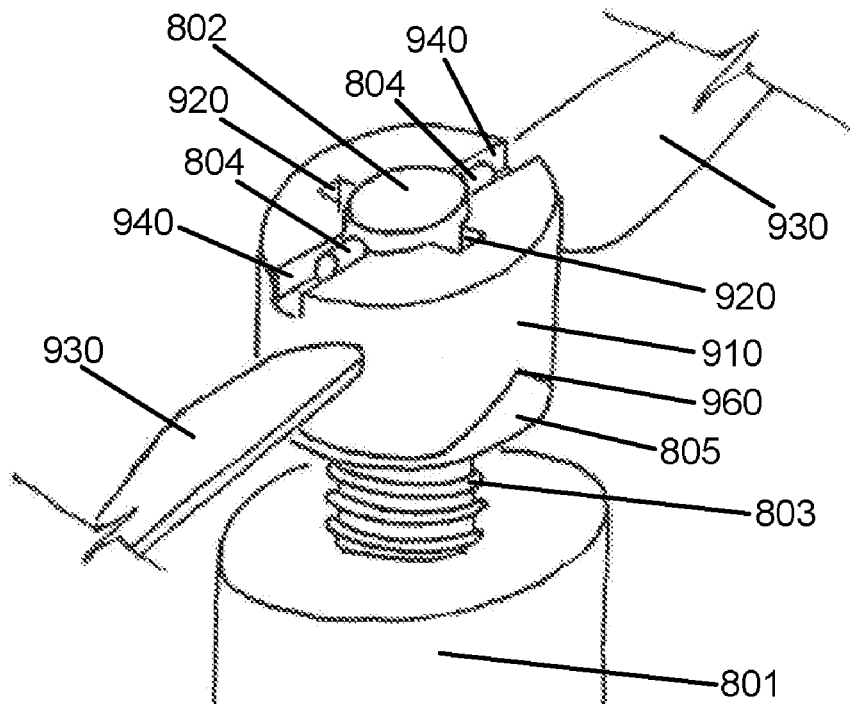

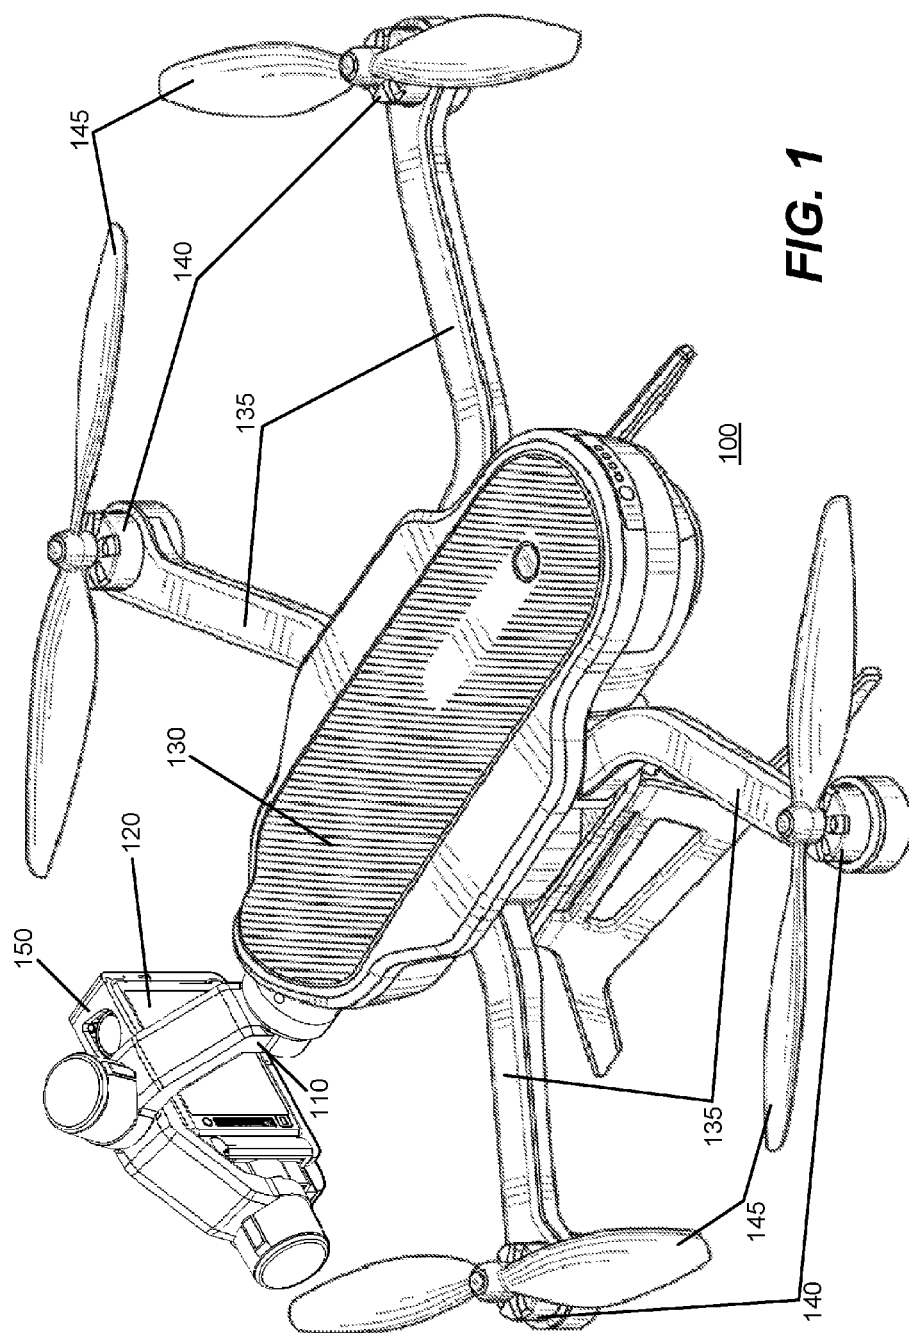


FIG. 1

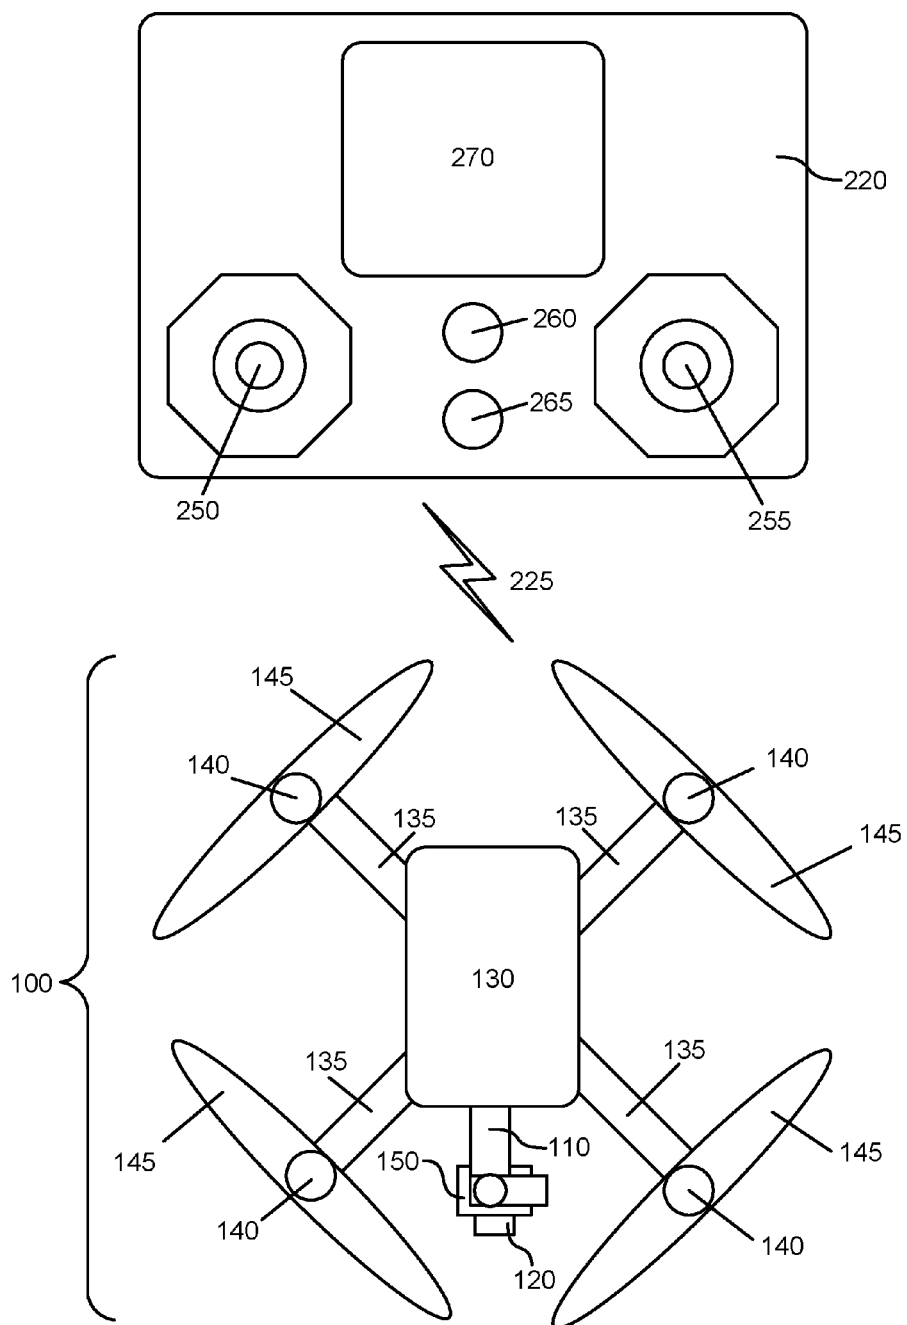


FIG. 2

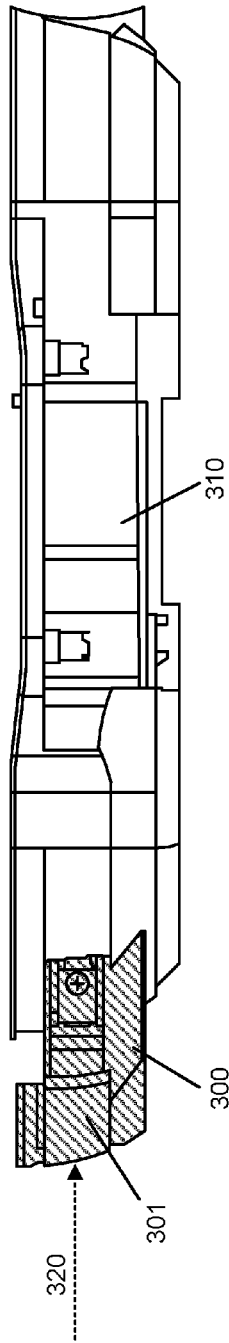


FIG. 3A

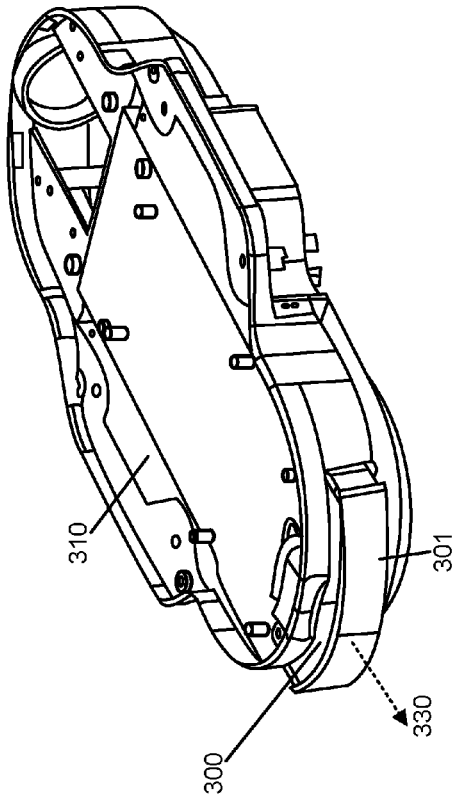


FIG. 3B

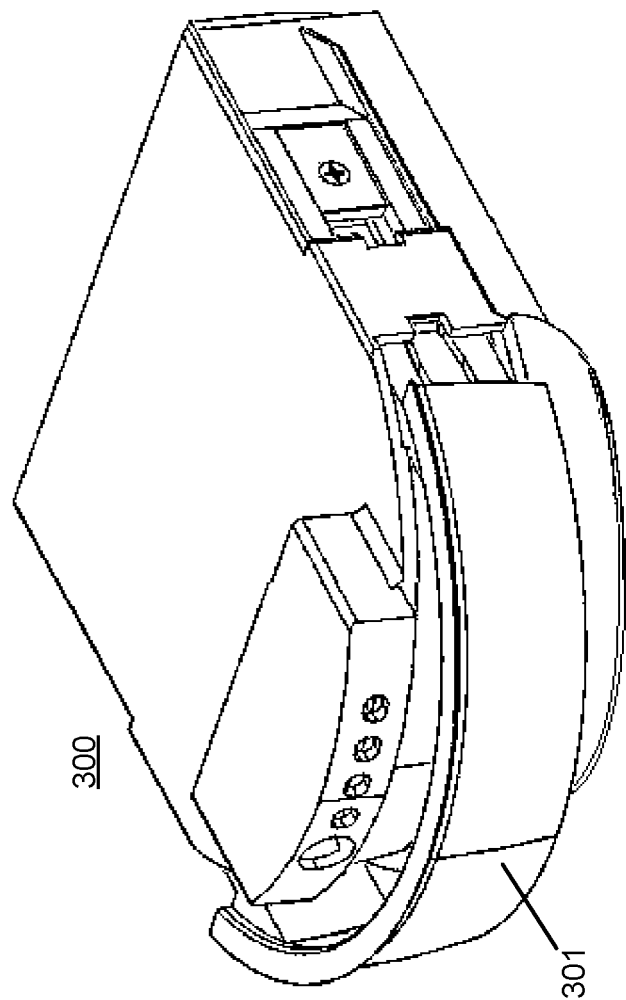


FIG. 4

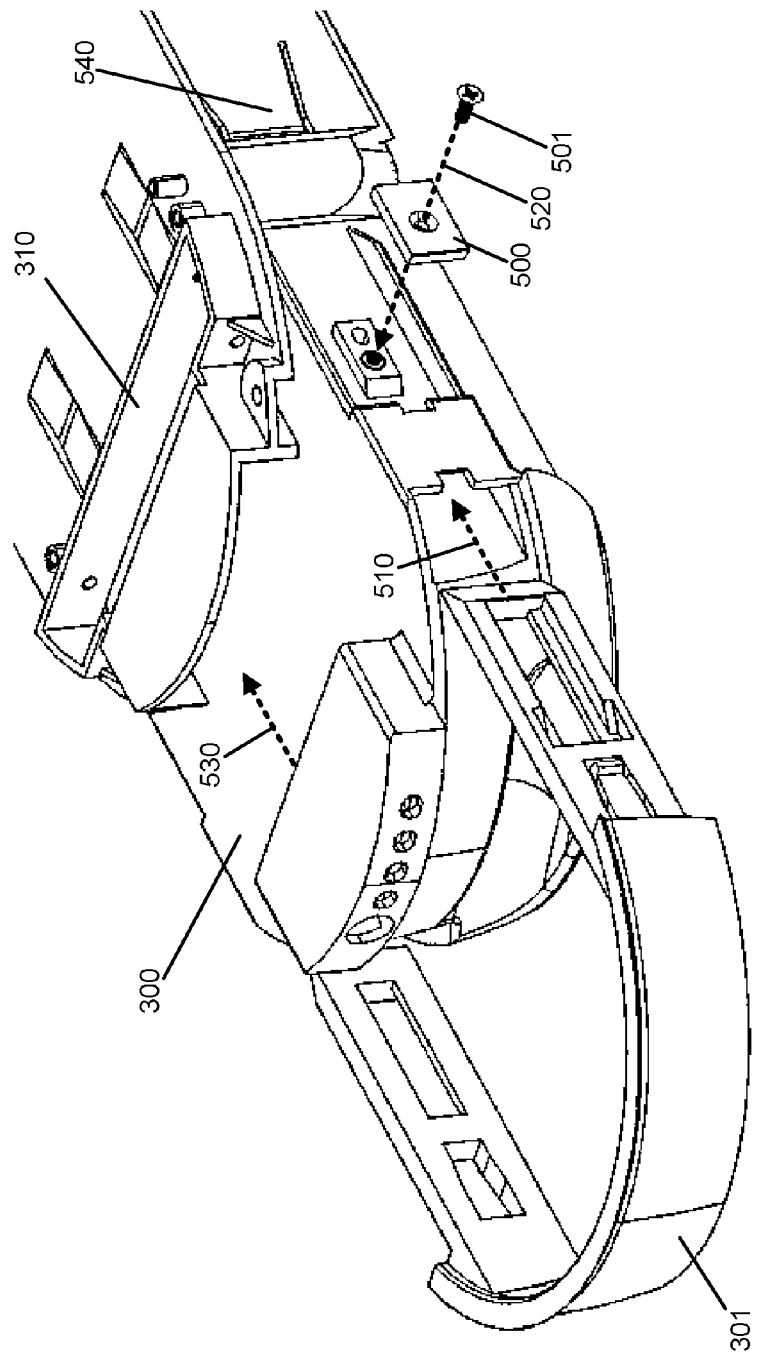


FIG. 5

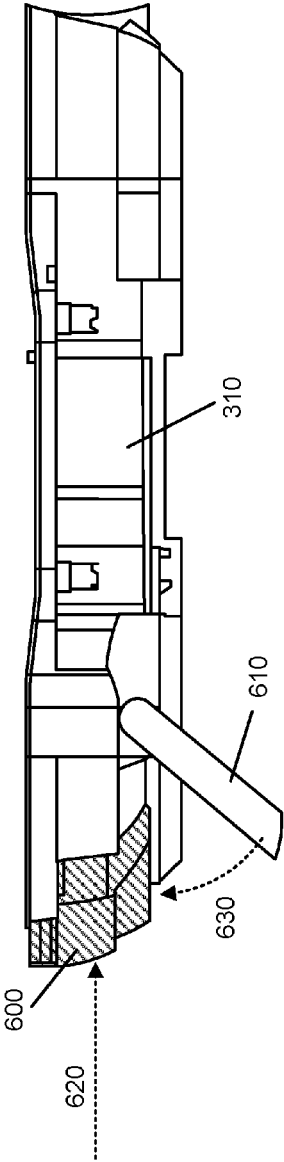


FIG. 6A

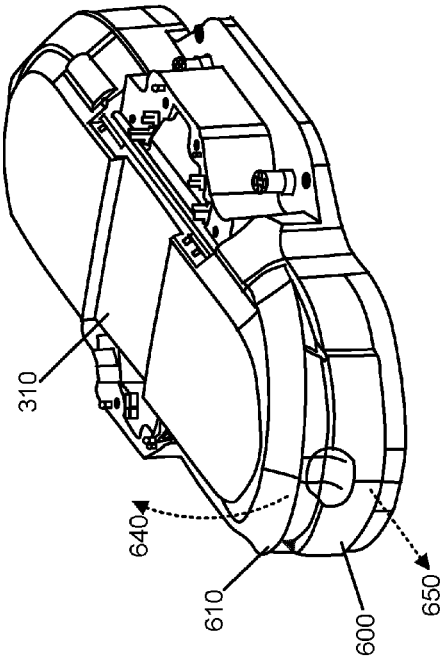


FIG. 6B

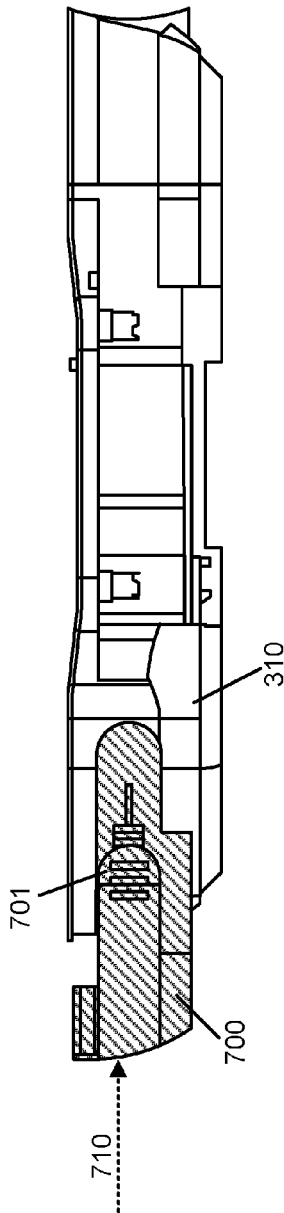


FIG. 7A

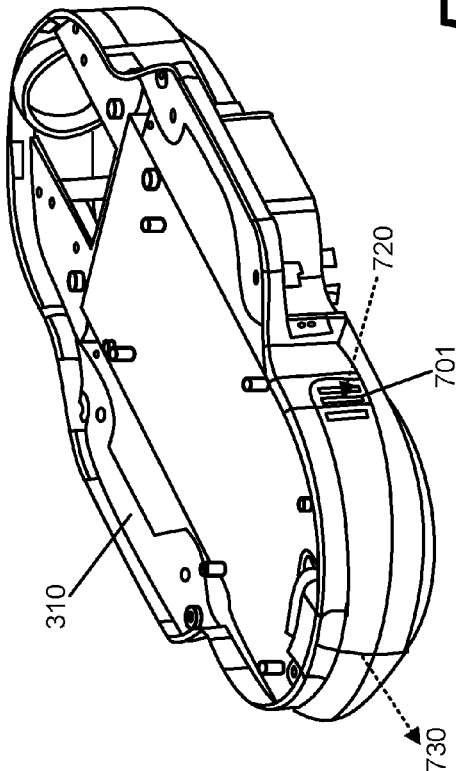


FIG. 7B

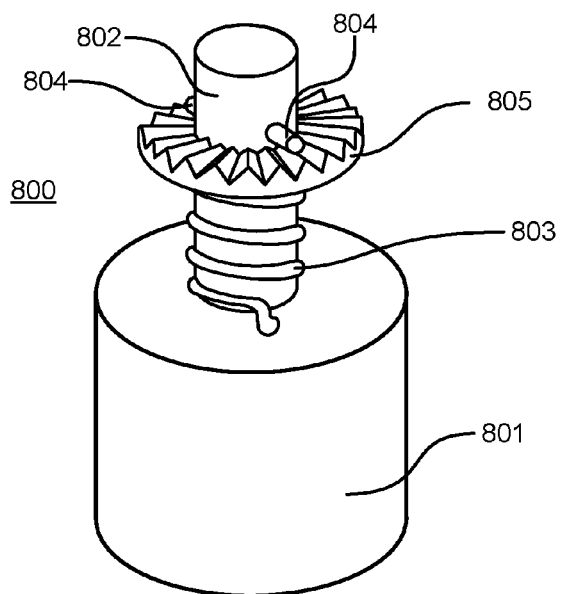


FIG. 8

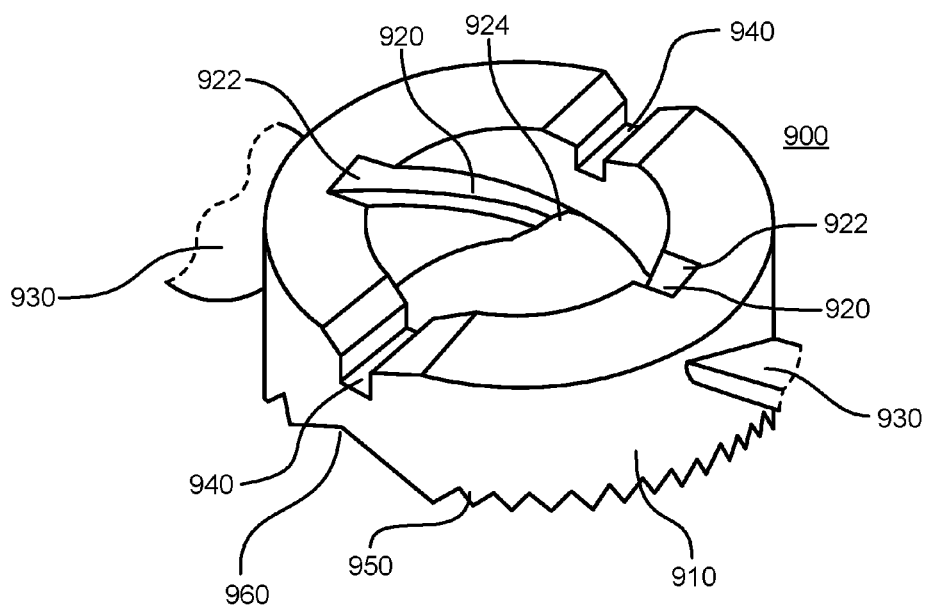


FIG. 9A

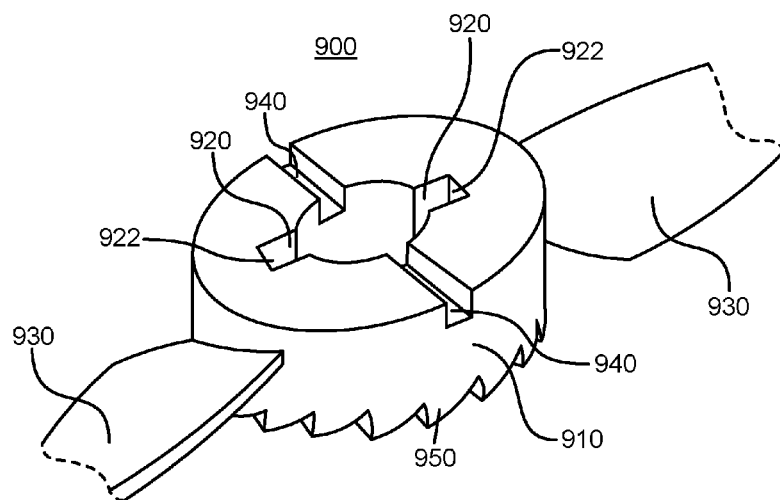


FIG. 9B

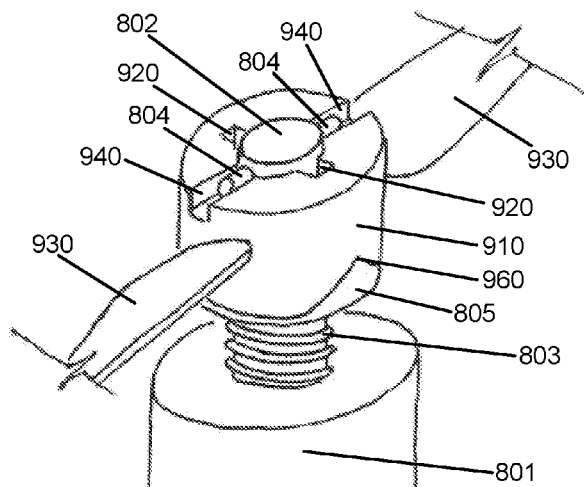


FIG. 10

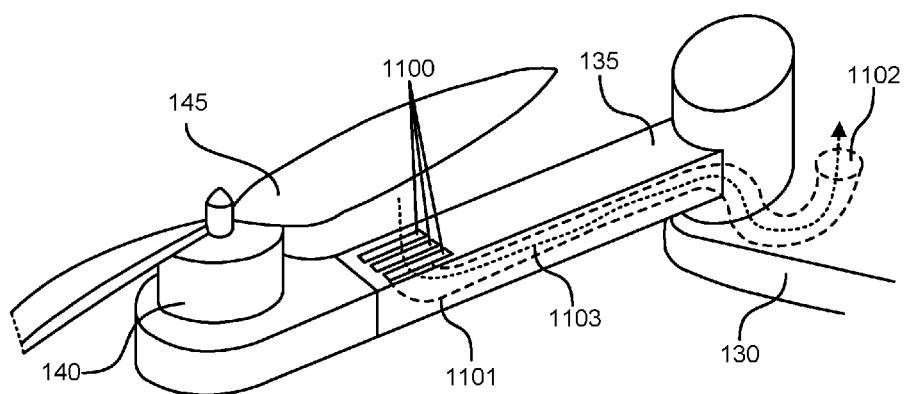


FIG. 11

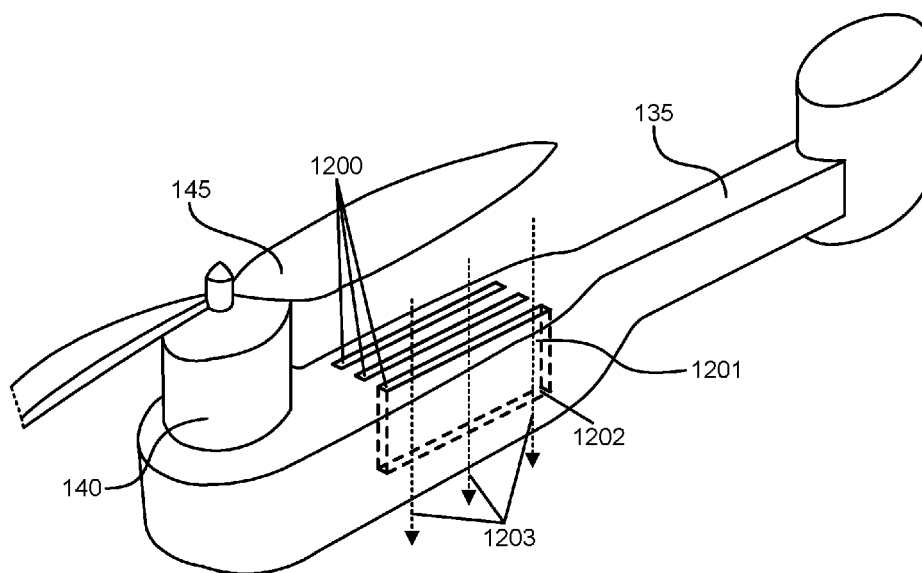


FIG. 12

COUPLING ASSEMBLY FOR A REMOVABLE PROPELLER

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. patent application Ser. No. 62/187,205, filed Jun. 30, 2015, the contents of which are incorporated by reference in its entirety.

TECHNICAL FIELD

[0002] The disclosure generally relates to the field of aerial vehicles and in particular to mechanical configurations for unmanned aerial vehicles.

BACKGROUND

[0003] Unmanned remote controlled aerial vehicles, such as quadcopters, continue to grow in popularity for both their commercial applications as well as recreational uses by hobbyists.

[0004] Another technology area with challenges has been power supply. Aerial vehicles are commonly powered by one or more batteries. After a battery loses its charge, a user may desire to swap out the battery, so that the aerial vehicle may continue to be flown without having to first recharge the battery. Consequently, a battery which can be removed quickly and easily is advantageous. Furthermore, some batteries swell or warp over time or when heated, which can make removal of a battery difficult.

[0005] As the popularity of aerial vehicles increases, an example area of technology that has been found susceptible to damage is assemblies for propeller blades. The propeller blades of an aerial vehicle may be susceptible to damage due to their light weight and high rate of rotation. Furthermore, due to their fragility, a user may wish to detach propellers prior to transporting the aerial vehicle. However, removing and attaching propeller blades may be time consuming or even impossible with existing aerial vehicles. Furthermore, many aerial vehicles require tools to remove propellers, which is inconvenient. Thus, it is advantageous to provide a propeller coupling assembly with easily replaceable propellers.

[0006] Additionally, during operation, processors, sensors, motors, and/or other electronics in aerial vehicles may overheat. Overheating may cause damage or cause electronics to behave sub-optimally. Aerial vehicles may need to carry heavy payloads or run computationally expensive image processing algorithms, exacerbating the overheating issue. Thus, a reliable means of cooling the aerial vehicle to offset the heat generated by the electronics may be advantageous.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] The disclosed embodiments have advantages and features which will be more readily apparent from the detailed description, the appended claims, and the accompanying figures (or drawings). A brief introduction of the figures is below.

[0008] FIG. 1 is an example of a remote controlled aerial vehicle with an attached gimbal.

[0009] FIG. 2 illustrates an example configuration of a remote controlled aerial vehicle in communication with a remote controller.

[0010] FIG. 3A and FIG. 3B illustrate an example of a pull-bar battery and a chassis of an aerial vehicle.

[0011] FIG. 4 illustrates an example of a pull-bar battery.

[0012] FIG. 5 illustrates an exploded view of a pull-bar battery and a chassis of an aerial vehicle.

[0013] FIG. 6A and FIG. 6B illustrate an example of a removable battery and a chassis of an aerial vehicle with a lever assembly.

[0014] FIG. 7A and 7B illustrate an example of a latch battery and a chassis of an aerial vehicle.

[0015] FIG. 8 illustrates an example of a propeller locking mechanism.

[0016] FIG. 9A and FIG. 9B illustrate an example of a removable propeller.

[0017] FIG. 10 illustrates an example of a removable propeller coupled to a propeller locking mechanism.

[0018] FIG. 11 illustrates an example of vents and an air pathway to cool electronics in the aerial vehicle.

[0019] FIG. 12 illustrates an example of vents to cool electronics in the arm of the aerial vehicle.

DETAILED DESCRIPTION

[0020] The Figures (FIGS.) and the following description relate to preferred embodiments by way of illustration only. It should be noted that from the following discussion, alternative embodiments of the structures and methods disclosed herein will be readily recognized as viable alternatives that may be employed without departing from the principles of what is claimed.

[0021] Reference will now be made in detail to several embodiments, examples of which are illustrated in the accompanying figures. It is noted that wherever practicable similar or like reference numbers may be used in the figures and may indicate similar or like functionality. The figures depict embodiments of the disclosed system (or method) for purposes of illustration only. One skilled in the art will readily recognize from the following description that alternative embodiments of the structures and methods illustrated herein may be employed without departing from the principles described herein.

Configuration Overview

[0022] Disclosed by way of example embodiments is a remote controlled unmanned aerial vehicle, or drone.

[0023] The aerial vehicle may include a removable battery. Various embodiments of removable battery assemblies may include a pull-bar battery assembly, a latch battery assembly, and a lever battery assembly. These various embodiments, may allow a user to attach and/or remove a battery quickly and easily. In some embodiments, the battery and/or the aerial vehicle include an element to assist a user in removing a battery that may have swollen or warped during operation of the aerial vehicle.

[0024] The aerial vehicle may include a propeller coupling assembly for coupling a propeller hub of a propeller to a propeller locking mechanism. The propeller locking mechanism may be rotated by a rotor of the aerial vehicle to rotate the propeller. The propeller locking mechanism may include a shaft, a plate, a spring, and one or more pins. The shaft may be coupled to a rotor. The plate may include an opening through which the shaft passes. The plate may have a toothed surface. The spring may encircle the shaft and may

couple to the shaft and/or rotor at a first end and couple to the plate at a second end. The one or more pins may extend from the shaft.

[0025] The removable propeller may include a propeller hub coupled to one or more propeller blades. The propeller hub may include an aperture, one or more grooves, and one or more slots. The aperture may have a first opening at a first end of the propeller hub and a second opening at a second end of the propeller hub. The aperture may be cylindrical and the aperture may be coaxial with the shaft when the propeller locking mechanism couples to the propeller hub. The one or more grooves may each be formed in the aperture. Each groove may include a first opening at the first end of the propeller hub and a second opening at the second end of the propeller hub. The one or more grooves may be of sufficient size to allow the one or more pins of the propeller locking mechanism to pass through the grooves. The propeller hub may be a cylindrical shell, where the aperture is bounded by an internal surface of the cylindrical shell, and the one or more grooves are formed on the internal surface of the cylindrical shell. Each of the one or more grooves may rotate around an axis concentric with the aperture. The second opening of each of the one or more grooves may be directly opposite a respective one of the one or more slots. The one or more slots may be formed on the first end of the propeller hub. The propeller hub may also include a plurality of teeth extruding from the second end of the propeller hub. These teeth may reciprocally couple to the plate of the propeller locking mechanism.

[0026] When the propeller locking mechanism and the propeller hub are coupled together, each of the one or more pins of the propeller locking mechanism may fit into a corresponding slot of the one or more slots formed on the first end of the propeller hub, the aperture of the propeller hub may encircle the shaft, and the plate of the propeller locking mechanism and the second end of the second end of the propeller hub may mesh together. Also, the spring of the propeller locking mechanism may be compressed beyond its equilibrium when the propeller locking mechanism and the propeller hub are coupled together.

[0027] The aerial vehicle may also include vents in an arm of the aerial vehicle. The vents within the arm may capture airflow from around the aerial vehicle **100** and direct that airflow through one or more air pathways. The one or more air pathways may lead to components that benefit from cooling such as electrical motors, circuit boards and power sources. The cooling may allow for a decreased need in adding heat sinks to cool structures within the aerial vehicle. Moreover, this configuration also may help prolong operational use of the aerial vehicle **100** by obviating the need for additional weight from added heat sinks.

Example Aerial Vehicle Configuration

[0028] FIG. 1 illustrates an example embodiment in which the aerial vehicle **100** is a quadcopter (i.e., a helicopter with four rotors). The aerial vehicle **100** in this example may include a housing **130** for payload (e.g., electronics, storage media, and/or camera), one or more arms **135**, one or more rotors **140**, and one or more propellers **145**. Each arm **135** may mechanically couple with a rotor **140** to create a rotary assembly. Each rotor **140** may be coupled to a respective propeller **145**. When the rotors **140** are operational, all the propellers **145** may spin at appropriate speeds to allow the aerial vehicle **100** to lift (take off), land, hover, and move

(forward, backward) in flight. Modulation of the power supplied to each of the rotors **140** may control the trajectory and torque on the aerial vehicle **100**.

[0029] A gimbal **110** may be coupled to the housing **130** of the aerial vehicle **100** through a removable coupling mechanism that mates with a reciprocal mechanism on the aerial vehicle **100** having mechanical and communicative capabilities. The gimbal **110** may be removed from the aerial vehicle **100**. In some embodiments, the gimbal **110** may also be capable of being removably attached to a variety of other mount platforms, such as a handheld grip, a vehicle, and a generic mount, which can itself be attached to a variety of platforms. In some embodiments, the gimbal **110** may be attached or removed from a platform without the use of tools.

[0030] The gimbal **110** may be a 3-axis gimbal **110** with three motors, each corresponding to a respective axis. The gimbal **110** may be configured to allow for rotation of an object, such as a camera **120**, about an axis within an x-y-z Cartesian coordinate system. The gimbal **110** may couple to a camera frame **150** that couples to a camera **120**. The gimbal **110** and the camera frame **150** may form a mounting structure and when coupled together the entire assembly may be referenced as a gimbal **110** for ease of discussion. The camera frame **150** may be configured to allow the camera **120** to detachably couple (e.g., attach) to it and may include electrical connection points for the coupled camera **120**. The gimbal **110** may allow for the camera frame **150** to maintain a particular position and/or orientation so that the camera **120** mounted to it may remain steady as the aerial vehicle **100** is in flight. In some embodiments, the camera frame **150** may be integrated into the gimbal **110** as a camera mount. In some embodiments, the camera frame **150** may be omitted and the gimbal **110** may couple electronically and mechanically to the camera **120**.

Remote Controlled Aerial Vehicle

[0031] FIG. 2 illustrates an aerial vehicle **100**, which communicates with a remote controller **220** via a wireless network **225**. The aerial vehicle **100** in this example is shown with a housing **130** and arms **135** of an arm assembly. In addition, this example embodiment shows a rotor **140** coupled with the end of each arm **135** of the arm assembly, a gimbal **110**, and a camera **120**.

[0032] The aerial vehicle **100** communicates with the remote controller **220** through the wireless network **225**. The remote controller **220** may be a dedicated remote controller or may be another computing device such as a laptop, smartphone, or tablet that is configured to wirelessly communicate with and control the aerial vehicle **100**. In one embodiment, the wireless network **225** may be a long range wireless communication system, for example, a long range Wi-Fi system. It also may include or be another wireless communication system, for example, one based on long term evolution (LTE), 3G, 4G, or 5G mobile communication standards. The wireless network **225** may include a unidirectional RC channel used for communication of controls from the remote controller **220** to the aerial vehicle **100** and a separate unidirectional channel used for video downlink from the aerial vehicle **100** to the remote controller **220** (or to a video receiver where direct video connection may be desired).

[0033] The remote controller **220** in this example includes a first control panel **250** and a second control panel **255**, an

ignition button **260**, a return button **265** and a screen **270**. The first control panel, e.g., control panel **250**, may be used to control the vertical direction (e.g. lift and landing) of the aerial vehicle **100**. The second control panel, e.g., control panel **255**, may be used to control the horizontal direction of the aerial vehicle **100**. Each control panel **250**, **255** may be structurally configured as a joystick controller and/or touch pad controller. The ignition button **260** may be used to start the rotary assembly (e.g., start the propellers **145**). The return button **265** can be used to override the controls of the remote controller **220** and transmit instructions to the aerial vehicle **100** to return to a predefined location. The ignition button **260** and the return button **265** can be mechanical and/or solid state press sensitive buttons.

[0034] In addition, the ignition button **260** and the return button **265** may be illuminated with one or more light emitting diodes (LED) to provide additional details. For example the LED may switch from one visual state to another to indicate with respect to the ignition button **260** whether the aerial vehicle **100** is ready to fly (e.g., lit green) or not (e.g., lit red) or whether the aerial vehicle **100** is now in an override mode on a return path (e.g., lit yellow) or not (e.g., lit red). It also is noted that the remote controller **220** may include other dedicated hardware buttons and switches and those buttons and switches may be solid state buttons and switches. For example, a button or switch may be configured to allow for triggering a signal to the aerial vehicle **100** to immediately execute a landing operation and/or a return to designated location.

[0035] The remote controller **220** may also include hardware buttons or other controls that control the gimbal **110**. The remote controller **220** may allow its user to change the preferred orientation of the camera **120**. In some embodiments, the preferred orientation of the camera **120** may be set relative to the angle of the aerial vehicle **100**. In another embodiment, the preferred orientation of the camera **120** may be set relative to the ground.

[0036] The remote controller **220** also may include a screen **270** (or display) which provides for visual display. The screen **270** may be a touch sensitive screen. The screen **270** also may be, for example, a liquid crystal display (LCD), an LED display, an organic LED (OLED) display, and/or a plasma screen. The screen **270** may allow for display of information related to the remote controller **220**, such as menus for configuring the remote controller **220** or remotely configuring the aerial vehicle **100**. The screen **270** also may display images or video captured from the camera **120** coupled with the aerial vehicle **100**, wherein the images and video are transmitted to the remote controller **220** via the wireless network **225**. The video content displayed on the screen **270** may be a live feed of the video or a portion of the video captured by the camera **120**. It is noted that the video content may be displayed on the screen **270** within a short time (e.g., fractions of a second) of being captured by the camera **120**.

[0037] The video may be overlaid and/or augmented with other data from the aerial vehicle **100** such as the telemetric data from a telemetric subsystem of the aerial vehicle **100**. The telemetric subsystem may include navigational components, such as a gyroscope, an accelerometer, a compass, a global positioning system (GPS), and/or a barometric sensor. In one example embodiment, the aerial vehicle **100** may incorporate the telemetric data with video that is transmitted back to the remote controller **220** in real time. The received

telemetric data may be extracted from the video data stream and incorporate into predefined templates for display with the video on the screen **270** of the remote controller **220**. The telemetric data also may be transmitted separate from the video from the aerial vehicle **100** to the remote controller **220**. Synchronization methods such as time and/or location information may be used to synchronize the telemetric data with the video at the remote controller **220**. This example configuration may allow a user, e.g., operator, of the remote controller **220** to see where the aerial vehicle **100** is flying along with corresponding telemetric data associated with the aerial vehicle **100** at that point in the flight. Further, if the user is not interested in telemetric data being displayed real-time, the data may still be received and later applied for playback with the templates applied to the video.

[0038] The predefined templates may correspond with "gauges" that provide a visual representation of speed, altitude, and charts, e.g., as a speedometer, altitude chart, and a terrain map. The populated templates, which may appear as gauges on the screen **270** of the remote controller **220**, may further be shared, e.g., via social media, and or saved for later retrieval and use. For example, a user may share a gauge with another user by selecting a gauge (or a set of gauges) for export. Export may be initiated by clicking the appropriate export button, or a drag and drop of the gauge(s). A file with a predefined extension may be created at the desired location. The gauge may be selected and be structured with a runtime version of the gauge. The gauge may also be played back through software that can read the file extension.

Removable Battery

[0039] In some embodiments, the aerial vehicle **100** contains one or more removable batteries. A removable battery, as used herein, may refer to both the electrochemical device used to store chemical energy in one or more cells and to the mechanical structure, e.g., the housing surrounding the electrochemical device and/or an assembly to mechanically couple to the aerial vehicle **100**. In some embodiments, the battery may be rechargeable. The housing may include electrical contacts, which allows the aerial vehicle **100** to receive power from the battery. The housing may also include electrical contacts which allow for charging the battery. In some embodiments, the contacts used to discharge the battery during operation of the aerial vehicle **100** may be the same contacts used to recharge the battery. The electrical contacts may also be used to communicate with the aerial vehicle **100**. This communication may allow the aerial vehicle **100** to receive an indication of the current charge of the battery or allow the aerial vehicle **100** to authenticate the battery via an authentication protocol. The housing of the battery may also contain mechanisms for mechanically coupling to the aerial vehicle **100** and/or mechanisms for assisting the user in attaching or detaching the battery to or from the aerial vehicle **100**. Herein, three types of removable batteries are illustrated: a pull-bar battery, a lever assembly battery, and a latch battery.

[0040] FIGS. 3A-3B depict an example embodiment of a pull-bar battery **300** and the chassis **310**. The chassis **310** may be part of the aerial vehicle **100** and may provide a cavity within which the pull-bar battery mechanically couples. The pull-bar battery **300** may include a pull-bar **301** which may assist the user in removing the pull-bar battery **300**. The chassis **310** may be part of the housing **130** of the

aerial vehicle 100. FIG. 3A illustrates a right side view of the pull-bar battery 300 partially removed from the chassis 310 with the pull-bar 301 contracted. The arrow 320 in FIG. 3A illustrates the direction in which the user may push the pull-bar battery 300 when attaching the pull-bar battery 300 to the chassis 310. In some example embodiments, the pull-bar 301 may be flush with the pull-bar battery 300 and/or the chassis 310 when contracted.

[0041] FIG. 3B illustrates a rear, top, and right view of the pull-bar battery 300 coupled to the chassis 310 with the pull-bar 301 extended. The arrow 330 in FIG. 3B illustrates the direction that a user may pull on the pull-bar 301 to first extend the pull-bar 301 and then to remove the pull-bar battery 300 from the chassis 310. In some embodiments, the pull-bar battery 300 may be removed (or decoupled) in one continuous motion simply by pulling on the pull-bar 301. In some example embodiments, the pull-bar battery 300 couples to the chassis 310 by friction. In other example embodiments, when inserted completely into the chassis 310, the pull-bar battery 300 may be locked into place by a latch or a set of latches on the chassis 310. The latch or latches may couple to corresponding hardware on the pull-bar battery 300. In some embodiments, the pull-bar battery 300 may include a latch which couples with a corresponding mechanism in the chassis 310. One or more latches on the pull-bar battery 300 and/or on the aerial vehicle 100 may be disengaged by extending the pull-bar 301, thus enabling the pull-bar battery 300 to be removed. It will be apparent to one skilled in the art that alternate locking mechanism may be used in place of a latch. The pull-bar 301 may function to unlock the pull-bar battery 300 from the chassis 310 as well as a handle to make removal of the pull-bar battery 300 easy for a user. The pull-bar 301 may make removable of the pull-bar battery 300 easier by operating as a handle for the user to grab when removing the battery. This may assist the user in removing a depleted or partially-depleted pull-bar battery 300 that would otherwise be difficult to remove in cases in which the pull-bar battery 300 has swelled or warped while being discharged.

[0042] FIG. 4 and FIG. 5 illustrate a pull-bar battery 300 according to some example embodiments. FIG. 4 illustrates a pull-bar battery 300 in isolation that includes the characteristic pull-bar 301. FIG. 5 illustrates an exploded view of the pull-bar battery 300, partially inside the chassis 310 of the aerial vehicle 100. In FIG. 5, the pull-bar 301, a tab 500, and a screw 501 are shown detached from the rest of the pull-bar battery 300 for illustrative purposes. The arrows 520 illustrate the way in which the pull-bar 301, a tab 500, and a screw may be assembled together. The arrow 530 illustrates how the pull-bar battery 300 may couple to the chassis 310. Specifically, the pull-bar battery 300 may be inserted into the battery cavity formed by the chassis 310 to couple within the aerial vehicle 100. In one example embodiment, the pull-bar 301 may be configured so that when it is pushed into the chassis 310 portion, a handle edge of the pull-bar battery 300 is substantially flush with a frame of the aerial vehicle 100.

[0043] The chassis 310 may include a battery locking spring 540 which locks the pull-bar battery 300 in the chassis 310. In some embodiments, when the pull-bar 301 is compressed, the battery locking spring 540 may prevent the pull-bar battery 300 from being removed. When the pull-bar 301 is compressed, a protruding element on the battery locking spring 540 may be adjacent to the tab 500 of the

pull-bar battery 300, thereby preventing the pull-bar battery 300 from being removed. That is, the contact between the tab 500 and the battery locking spring 540 may block the pull-bar battery 300 from being removed from the chassis 310. When the pull-bar 301 is sufficiently extended away from the chassis 310, the protruding element of the battery locking spring 540 may be pushed away from the tab 500 by a slanted surface on the pull-bar 301, thus unlocking the pull-bar battery 300 from the chassis 310. In this way, the pull-bar battery 300 may be locked into place by the battery locking spring 540 when the pull-bar 301 is compressed and may be unlocked (i.e., removable/decoupled) when the pull-bar 301 is extended. Similar locking mechanisms known to one skilled in the art which can be unlocked by extending the pull-bar 301 also may be used to couple the pull-bar battery 300 to the chassis 310.

[0044] FIG. 6A and FIG. 6B illustrate an example embodiment of a removable battery that may be coupled and removed, by a lever assembly, from the battery cavity formed by the chassis coupled with the aerial vehicle 100. FIG. 6A illustrates a right side view of a removable battery 600 and a chassis 310 with a lever 610. The lever 610 is shown in an open position in FIG. 6A. The removable battery 600 couples with the chassis 310.

[0045] In order to couple the removable battery 600 with the chassis 310, a user may push the removable battery 600 into a cavity of the chassis 310 in the direction indicated by arrow 620 and then pull the lever 610 towards the underside of the chassis 310 in the direction indicated by arrow 630. In some embodiments, the lever 610 may operate a locking mechanism, which locks the removable battery 600 into the chassis 310 of the aerial vehicle 100. This locking mechanism may be such that the removable battery 600 is locked into the chassis 310 when the lever 610 is closed and unlocked from the chassis 310 (i.e., able to be removed) when the lever 610 is open. In some example embodiments, pushing the removable battery 600 into the cavity in the chassis 310 may cause the lever 610 to be closed. Thus, only a single action may be required by the user to insert the removable battery 600 and lock it into place. In an alternate embodiment, the user inserting the removable battery 600 into the corresponding cavity in the chassis 310 may not close the lever 610, and the lever 610 may need to be closed by a separate action of the user.

[0046] FIG. 6B illustrates a rear, bottom, and left view of an embodiment of the removable battery 600 shown in FIG. 6A in which the lever 610 is nearly closed and where the removable battery 600 is fully inserted into the corresponding cavity in the chassis 310 of the aerial vehicle 100. In order to remove (or decouple) the removable battery 600 from the chassis 310, the lever 610 may be pulled away from underside of the chassis 310 in the direction indicated by the arrow 640, which may unlock the removable battery 600 from the chassis 310. The removable battery 600 may then be removed by pulling in the direction indicated by the second arrow 650—down and away from a bottom of the chassis 310. In some embodiments, pulling the lever 610 away from the underside of the chassis 310 when removing the removable battery 600 may also move the removable battery 600 in the direction indicated by the second arrow 650. A user may subsequently remove the removable battery 600 by pulling in the direction of the second arrow 650 away from the chassis 310. The mechanical advantage provided by the lever 610 may make removing the removable battery

600 significantly easier. This mechanical advantage may assist the user in removing a depleted or partially-depleted removable battery **600** that would otherwise be difficult to remove in cases in which the removable battery **600** has swelled or warped while being discharged.

[0047] FIG. 7A and FIG. 7B illustrate an embodiment of a removable battery that may be coupled and removed from the aerial vehicle **100** by a latch or “squeeze open” assembly. FIG. 7A illustrates a left side view of the latch battery **700** and chassis **310**. In the embodiment illustrated in FIG. 7A, the latch battery **700** is shown partially inside the corresponding cavity of the chassis **310**. FIG. 7B illustrates a rear, top, and right view of the chassis **310** and latch battery **700**. The chassis **310** may be part of the aerial vehicle **100**. The chassis **310** may have a cavity within with the latch battery **700** may be mechanically inserted and couple with the aerial vehicle **100** to provide power to the aerial vehicle **100**.

[0048] The latch battery **700** may include buttons **701** which may be used to decouple the latch battery **700** and the chassis **310**. The latch battery **700** may be coupled to the chassis **310** by pushing the latch battery **700** in the direction indicated by the arrow **710**. Once the latch battery **700**, is fully inserted into the cavity in the chassis **310**, a locking mechanism may be triggered. The latch battery **700** may be removed by pressing on the buttons **701** as depicted by the arrow **720** while simultaneously pulling the latch battery **700** in the direction indicated by the arrow **730**.

[0049] These various embodiments of batteries may allow a battery to be quickly attached to and/or removed from an aerial vehicle **100**. The various embodiments described above may also securely attach the battery to the aerial vehicle **100**.

Detachable Propeller

[0050] The propeller blades of an aerial vehicle **100**, such as a quadcopter, are often susceptible to damage due to their light weight and high rate of rotation. Thus, it may be advantageous to provide for easily replaceable propellers.

[0051] FIG. 8, FIG. 9A, FIG. 9B, and FIG. 10 illustrate example embodiments of removable propellers and corresponding propeller locking mechanisms which may allow for quick replacement of a propeller without the use of tools. A removable propeller and propeller locking mechanism may couple together as a propeller coupling assembly. The propeller coupling assembly may permit the propeller to be detached from and/or coupled to the aerial vehicle **100** without the use of tools. The propeller coupling assembly may lock the propeller into place and may be configured to prevent the propeller from accidentally detaching from propeller locking mechanism.

[0052] FIG. 8 illustrates an embodiment of a propeller locking mechanism **800**. The propeller locking mechanism **800** may include a base **801**, a shaft **802**, a spring **803**, a one or more pins **804**, and/or a toothed plate **805**. The base **801** may be rigidly coupled to the shaft **802**, which may in turn be rigidly coupled to the one or more pins **804**. One end of the spring **803** may be attached to the base **801** and/or the shaft **802** and the other end may be attached to the toothed plate **805**. The base **801** may be rigidly coupled to the shaft **802** so as to comprise a single shaft. The toothed plate **805** may include a plurality of teeth that provide adjacent ridges and valleys to which a reciprocal element of a propeller **145** may couple. The teeth of the toothed plate **805** may be located on the side of the toothed plate **805** opposite the base

801 (i.e., the teeth may face away from the base **801**). The shaft **802** may pass through the toothed plate **805** and the toothed plate **805** may be able to move up and down, along the axis of the shaft **802**. Vertical translation and/or rotation of the toothed plate **805** may cause the spring **803** to deform, e.g., compress, thus exerting an upward force on the toothed plate **805**. The shaft **802** and/or the base **801** may be coupled to a rotor (e.g., rotor **140**) of the aerial vehicle **100**. The rotor **140** may rotate a propeller by rotating the shaft **802**.

[0053] FIG. 9A and FIG. 9B illustrate example embodiments of a propeller **900**, which may couple to the propeller locking mechanism **800** illustrated in FIG. 8. The propeller **900** may be an embodiment of a propeller **145**. The propeller **900** may include a propeller hub **910** coupled to one or more propeller blades **930**. Only portions of the propeller blades **930** are shown in FIGS. 9A and 9B, as illustrated by the broken lines. The propeller hub **910** may include one or more locking slots **940**, one or more grooves **920**, and one or more lead-in chamfers **960**.

[0054] The propeller hub **910** may include an aperture with a first opening at a first end (e.g., the top of the propeller hub **910**) and a second opening at the second end (e.g., the bottom of the propeller hub **910**). The first opening and the second opening may be connected by an internal surface. The internal surface may be an open cylinder in which the openings of the cylinder are the first and second openings of the propeller hub **910**. The one or more grooves **920** may be on the internal surface. The one or more grooves **920** may each include a first groove opening **922** at the first end of the propeller hub **910** and a second groove opening **924** at the second end of the propeller hub **910**. The first groove openings **922** of the one or more grooves **920** may be part of the first opening of the aperture of the propeller hub **910**. Similarly, the second groove openings **924** of the one or more grooves **920** may be part of the opening of the second opening of the aperture of the propeller hub **910**. In some example embodiments, a second groove opening **924** is formed in a lead-in chamfer **960** formed on the second end of the propeller hub **910**. The lead-in chamfer **960** may include two slanted edges that form an indent in the second end of the propeller hub **910**. The peak of the lead-in chamfer **960** may be co-located with the opening of the second opening **924** of a respective groove **920**.

[0055] The one or more locking slots **940** and the one or more grooves **920** may be formed as indents in the propeller hub **910** (e.g., on the first end of the propeller hub **910**). In some example embodiments, the one or more locking slots **940** form a chamfered edge with the first end of the propeller hub **910** as illustrated in FIG. 9A. The one or more grooves **920** may be on the interior of the propeller hub **910** (e.g., the grooves **920** may run along the internal surface of the propeller hub **910**). In some example embodiments, the grooves **920** may rotate around an axis concentric with the internal surface of the propeller hub **910**, as illustrated in FIG. 9A. In some embodiments, the grooves **920** may be parallel with the axis of the internal surface in the propeller hub **910**, as illustrated in FIG. 9B. The propeller hub **910** may be in the shape of a cylindrical shell as illustrated in FIGS. 9A and 9B. The propeller hub **910** may be rigidly attached to the one or more propeller blades **930**. The propeller hub **910** and the propeller blades **930** may be elements of the same material body. The propeller hub **910** may have a toothed bottom **950** that includes a plurality of teeth that provide adjacent ridges and valleys that may

reciprocally couple to (and decouple from) the toothed plate 805 of the propeller locking mechanism 800.

[0056] The propeller hub 910 may fit around the shaft 802 of the propeller locking mechanism 800. In order to lock the propeller 900 to the propeller locking mechanism 800, a user may place the propeller hub 910 of the propeller 900 over the shaft 802 so that the shaft 802 is aligned with the aperture of the propeller hub 910. The pins 804 on the shaft 802 may block the propeller hub 910 from being pressed down unless the second groove openings 924 at the second end (e.g., the bottom) of the propeller hub 910 corresponding to the bottom ends of the grooves 920 are properly aligned with the pins 804. The pins 804 may fit into the grooves 920. By pressing down on the propeller 900 and rotating it, the propeller hub 910 may be moved past the pins 804 by running the pins 804 through the grooves 920 on the interior of the propeller hub 910. In example embodiments in which the second groove openings 924 of the propeller hub 910 are formed in lead-in chamfers 960, the lead-in chamfers 960 may make the user's task of aligning the second groove openings 924 with the pins 804 easier.

[0057] In some example embodiments, while the pins 804 enter the second openings 924 of the grooves 920 and/or enter the lead-in chamfer 960, the toothed bottom 950 of the propeller hub 910 may come into contact with the toothed plate 805. In alternate example embodiments, the toothed bottom 950 of the propeller hub 910 may come into contact with the toothed plate 805, while the pins 804 are being passed through the grooves 920. The toothed bottom 950 of the propeller hub 910 and the teeth on the top of the toothed plate 805 may reciprocally mesh together. As the propeller 900 is pressed down and rotated, the toothed plate 805 that is meshed to it may move down and rotate as well. Accordingly, as the propeller 900 is pushed down by the user, the spring 803 may cause the toothed plate 805 to exert a vertical restoring force on the propeller 900. The teeth of the toothed plate 805 may mesh with those on the propeller hub 910 forming a Hirth joint.

[0058] Once the pins 804 have passed completely through the grooves 920 by passing through the first groove openings 922 of the grooves 920, the user may maneuver the pins out of the grooves 920 so that the pins 804 are above the propeller 900. The user may align the locking slots 940 on the propeller 900 with the pins 804. The one or more locking slots 940 may have the same widths as the one or more grooves 920, because the one or more locking slots 940 couple with the one or more pins which pass through the one or more grooves 920. In some embodiments, torsion on the spring 803 may cause the locking slots 940 to align with the pins 804, mitigating the need for the user to align the pins 804 and locking slots 940. In some example embodiments, once the pins 804 have passed completely through the grooves 920 by passing through the first groove openings 922, the spring 803 may exert a rotational restoring force on the propeller hub 910 causing the propeller hub 910 to rotate so that the pins 804 align with the locking slots 940. In this way, the locking slots 940 of the propeller hub 910 may align with the pins 804 and the propeller hub 910 may lock into place when a user releases the propeller 900. The vertical force exerted by the spring 803 may hold the propeller 900 in place by pushing the locking slots 940 into the pins 804. Thus, when the pins 804 are in the locking slots 940 of the propeller 900, the propeller 900 may be locked to the propeller locking mechanism 800.

[0059] In some example embodiments, each of the pins 804 may be held at a first position by springs which are internal to the shaft 802 so that the pins 804 extend a first distance from the shaft 802. When a force is applied to the pins 804, such as when a user presses down on the pins 804, the pins 804 may be pushed into the shaft 802 by compressing and/or extending the springs attached to the pins 804. In some example embodiments, the groove 920 in the propeller 900 may be shallower at the top of the propeller 900 than at the bottom.

[0060] A groove 920 may be deep enough at the base of the propeller 900 so that a pin 804 can fit into the groove 920 without being pushed down, but may be too shallow at the top of the propeller for a pin 804 to fit into the groove without the pin 804 being pressed down. In such an embodiment, the user may not need to press down the pins 804 in order to attach the propeller 900 to the propeller locking mechanism 800—the pins 804 may be pressed down as the propeller 900 is twisted onto the propeller locking mechanism 800 and the grooves 920 becomes gradually shallower. However, the pins 804 may need to be pressed down in order to remove the propeller 900. This example embodiment may help prevent the propeller 900 from being inadvertently removed from the propeller locking mechanism 800 even if the pins 804 fall out of the locking slots 940. In other example embodiments, the grooves 920 may be of uniform depth. In those example embodiments, the pins 804 may need to be pressed down in order to attach and to remove the propeller 900. In some example embodiments the pins 804 are fixed (e.g., the pins 804 are not attached to springs and cannot be pushed down and thus the pins 804 extend a set length from the shaft 802). It is not required that the propeller locking mechanism 800 includes only two pins 804—any number of pins 804 may be used. Also, the propeller locking mechanism 800 may include an element of any shape that extends from the shaft 802 in place of a pin 804. Furthermore, in some example embodiments, the propeller 900 may include one or more pins on the internal surface of the cylindrical shell and the propeller locking mechanism 800 may include corresponding grooves on the shaft 802.

[0061] FIG. 10 illustrates an example embodiment of a propeller coupling assembly including a propeller 900 locked into a propeller locking mechanism 800. The embodiment shown in FIG. 10 is similar to the embodiments shown in FIG. 8, FIG. 9A, and FIG. 9B, in that attaching the propeller 900 to the propeller locking mechanism 800 may involve manipulating the propeller 900 so that the pins 804 pass through the grooves 920 of the propeller 900 and then rotating the propeller 900 so that pins 804 couple into the locking slots 940. The spring 803 may push the propeller 900 upward so that it stays locked in place. In the embodiment illustrated in FIG. 10, the interconnecting teeth on the propeller hub 910 of the propeller 900 and the toothed plate 805 of the propeller locking mechanism 800 are different than those illustrated in FIGS. 8, 9A, and 9B. The example embodiment of FIG. 10 is illustrated with two teeth (only the first tooth can be seen in FIG. 10), where each tooth is reciprocal with a respective lead-in chamfer 960 of the propeller hub 910. It will be apparent to one skilled in the art that any number and/or manner of teeth or keying mechanisms may be used to connect the propeller hub 910 to the propeller locking mechanism 800 and to transfer torque from the propeller locking mechanism 800 to the propeller

900 during operation of the rotor **140**. The interconnecting teeth or keying mechanism may be such that when the propeller **900** is locked into the propeller locking mechanism **800**, the spring **803** exerts no torque on the propeller **900** (i.e., the deforming forces on the spring **803** exerted by the attachments of the spring **803** to the toothed plate **805** and the base **801** are purely compressive and produce no torque), when the rotor **140** is not in operation. In some embodiments, a sleeve coupling assembly, a key and keyset pair, a spline coupling assembly, and/or some other type of coupling assembly may be used in place of the toothed bottom **950** of the propeller hub **910** and the toothed plate **805**.

[0062] In some example embodiments, the toothed plate **805** may be held at an equilibrium position when the propeller **900** is not attached. During the process of attaching the propeller **900**, while the pins **804** are in the grooves **920**, the toothed plate **805** may come into contact with the toothed bottom **950** of the propeller hub **910**. The equilibrium position of the toothed plate **805** may be such that the rotation of the propeller **900** with the respect of the shaft **802** when this contact occurs will be the same relative rotation at which the propeller **900** is locked into the propeller locking mechanism **800**. For example, in the embodiment illustrated in FIG. 9A, the bottom of each groove **920** is directly opposite a respective locking slots **940**. That is, the bottom of each groove **920** is directly under a respective locking slot **940**. Thus, if the spring **803** holds the toothed plate **805** at an equilibrium position so that the propeller **900** and the toothed plate **805** make contact when the pins **804** are near the bottom of the grooves **920**, then when the pins **804** are in the locking slots **940**, the propeller **900** will be at roughly the same orientation as when the toothed plate **805** first came into contact with the teeth of the propeller hub **910**. Because the spring **803** may be free of torsion when the toothed plate **805** is held at an equilibrium position, the spring **803** likewise may be free of torsion when the propeller **900** and the propeller locking mechanism **800** are locked together. Furthermore, because the position of the locking slots **940** correspond the position at which the spring **803** is free of torsion, the spring **803** may align the pins **804** and the locking slots **940** once the pins **804** have passed through the grooves **920**, which may make the action of locking the propeller **900** into place easier for a user.

[0063] The propeller coupling assembly allows the propeller **900** to removably couple to the propeller locking mechanism **800**. The propeller **900** may be quickly and easily attached to or removed from the aerial vehicle **100** without the use of the tools. The force of the toothed plate **805** on the propeller **900** resulting from the compressed spring **803** may keep the one or more pins **804** of the propeller locking mechanism **800** inside the locking slots **940** propeller hub **910**. The one or more pins **804** and/or the toothed plate **805** intermeshed with the toothed bottom **950** of propeller hub **910** may transfer a rotational load from the shaft **802** to the propeller **900**.

Thermal Vents

[0064] FIGS. 11 and 12 illustrate two example embodiments in which the arms **135** on the aerial vehicle **100** include vents. The vents may allow for airflow through the arms **135** for cooling of electronics within the aerial vehicle **100**. The electronics cooled by the airflow may be the motors that power the propellers, computer processors, and/or a power source for the aerial vehicle **100**; e.g., battery or

batteries. In some embodiments, the electronics may be near the airflow. In some example embodiments, the electronics may be connected to thermally conductive material, such as a metal wire, and the thermally conductive material may be convectively cooled by the airflow, which, in turn, cools the electronics. In some embodiments, the thermal vents may be coupled with, or integrated with, channels that direct received air to particular portions of the aerial vehicle **100**, e.g., where the electronics or power sources are located.

[0065] By way of example, in FIGS. 11 and 12 the vents are on the top of the arm **135** underneath the propeller. When the propellers are active, this configuration may increase the airflow **1103** into the vents which may enhance the cooling.

[0066] FIG. 11 illustrates an example embodiment with one or more vents **1100**, an air pathway **1101** (or channel), and an outlet vent **1102**. The embodiment of FIG. 11 may allow for airflow **1103** through the air pathway **1101**. The airflow **1103** is illustrated by a dashed-line indicating an air flow path within the air pathway **1101**. This airflow **1103** may be used to cool electronics in the arm **135** or in the housing **130** of the aerial vehicle **100**. Wires used to transfer power and/or control signals between the housing **130** and the motors in the rotors **140** may be in thermal contact with the airflow **1103**. This may allow heat generated by the motor to flow along the wire and be absorbed by the airflow **1103**, thus cooling the motor. The airflow **1103** also may be in thermal contact with electronics in the housing such as computer processors, sensors, communication circuits, and/or one or more battery. Thermal contact may comprise direct convective cooling of the electronics and/or convective cooling of a conductor that is in thermal contact with the electronics.

[0067] The airflow **1103** of each arm **135** may flow out of a single outlet vent **1102** or out of a plurality of outlet vents **1102**. The outlet vent **1102** is depicted in FIG. 11 as being oriented upwards, but in alternate embodiments the outlet vent **1102** may be oriented in some other direction. It is noted that there may be one or more outlet vents **1102** and one or more outlet vents may be directed towards specific components in the housing for which cooling airflow may be desired. The air pathway **1101** may be a connected cavity in the arm **135** and the housing **130**, or may be a tube that runs from the vents **1100** to the outlet vent **1102**. In FIG. 11, three thin rectangular vents **1100** are depicted, but in alternate embodiments the vents **1100** may vary in number, size, shape, and position.

[0068] FIG. 12 illustrates an alternate example embodiment of vents which may allow for airflow through the arms **135** of the aerial vehicle **100**. The illustrated embodiment includes three vents **1200**, an air pathway **1201**, and an outlet vent **1202**, the combination of which may allow for airflow **1203** through the air pathway **1201**. The airflow **1103** is illustrated by three dashed lines which depict air flow paths. In FIG. 12, only one air pathway **1201** and outlet vent **1202** are illustrated, however it is understood the remaining two vents **1200** likewise may have corresponding air pathways and output vents. The airflow **1203** may cool electronics in the arm and/or electrical components in the rest of the aerial vehicle, if the electrical components are in thermal contact with the airflow **1203** (e.g., through a wire which is convectively cooled by the airflow **1203** and which is connected to the electrical component). Some example embodiments may include a single air pathway **1201** to which every vent **1200** and output vent **1202** is connected. In some example

embodiments the arm **135** may be hollow, and the air pathway **1201** is the hollow cavity of the arm **135**. In some example embodiments, the arm **135** may include a different number of vents **1200** than is depicted in FIG. **12**.

[0069] Vents in the arm **135** of an aerial vehicle **100** may provide a reliable means of cooling the aerial vehicle **100** to offset the heat generated by the electronics. Cooling the components of the aerial vehicle **100** may obviate the overheating of processors, sensors, motors, and/or other electronics in the aerial vehicle **100**. Placing the vents (e.g., vents **1100** or vents **1200**) underneath a propeller **145** may produce greater airflow through air pathways (e.g., air pathway **1101** or air pathway **1201**) resulting in active cooling of the aerial vehicle **100** without the need for additional fans and/or heat sinks. In this way, this configuration may help prolong operational use of the aerial vehicle **100** by obviating the need for additional weight from cooling components, such as heat sinks and/or cooling fans.

Additional Considerations

[0070] Throughout this specification, plural instances may implement components, operations, or structures described as a single instance. Although individual operations of one or more methods are illustrated and described as separate operations, one or more of the individual operations may be performed concurrently, and nothing requires that the operations be performed in the order illustrated. Structures and functionality presented as separate components in example configurations may be implemented as a combined structure or component. Similarly, structures and functionality presented as a single component may be implemented as separate components. These and other variations, modifications, additions, and improvements fall within the scope of the subject matter herein.

[0071] Unless specifically stated otherwise, discussions herein using words such as “processing,” “computing,” “calculating,” “determining,” “presenting,” “displaying,” or the like may refer to actions or processes of a machine (e.g., a computer) that manipulates or transforms data represented as physical (e.g., electronic, magnetic, or optical) quantities within one or more memories (e.g., volatile memory, non-volatile memory, or a combination thereof), registers, or other machine components that receive, store, transmit, or display information.

[0072] As used herein any reference to “one embodiment” or “an embodiment” means that a particular element, feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment. The appearances of the phrase “in one embodiment” in various places in the specification are not necessarily all referring to the same embodiment.

[0073] Some embodiments may be described using the expression “coupled” and “connected” along with their derivatives. For example, some embodiments may be described using the term “coupled” to indicate that two or more elements are in direct physical or electrical contact. The term “coupled,” however, may also mean that two or more elements are not in direct contact with each other, but yet still co-operate or interact with each other. The embodiments are not limited in this context.

[0074] As used herein, the terms “comprises,” “comprising,” “includes,” “including,” “has,” “having” or any other variation thereof, are intended to cover a non-exclusive inclusion. For example, a process, method, article, or appa-

ratus that comprises a list of elements is not necessarily limited to only those elements but may include other elements not expressly listed or inherent to such process, method, article, or apparatus. Further, unless expressly stated to the contrary, “or” refers to an inclusive or and not to an exclusive or. For example, a condition A or B is satisfied by any one of the following: A is true (or present) and B is false (or not present), A is false (or not present) and B is true (or present), and both A and B are true (or present). [0075] In addition, use of the “a” or “an” are employed to describe elements and components of the embodiments herein. This is done merely for convenience and to give a general sense of the invention. This description should be read to include one or at least one and the singular also includes the plural unless it is obvious that it is meant otherwise.

[0076] Upon reading this disclosure, those of skill in the art will appreciate still additional alternative structural and functional designs for the disclosed aerial vehicle and associated systems. Thus, while particular embodiments and applications have been illustrated and described, it is to be understood that the disclosed embodiments are not limited to the precise construction and components disclosed herein. Various modifications, changes and variations, which will be apparent to those skilled in the art, may be made in the arrangement, operation and details of the method and apparatus disclosed herein without departing from the spirit and scope defined in the appended claims.

What is claimed is:

1. A propeller coupling assembly comprising:

a propeller locking mechanism, the propeller locking mechanism comprising:

a shaft, the shaft coupled to a rotor;

a plate, the plate including an opening to receive the shaft;

a spring, the spring encircling the shaft, wherein the spring is coupled to the shaft at a first end and the spring is coupled to the plate at a second end; and

one or more pins, the pins extending from the shaft; and

a propeller hub structured to couple to the propeller locking mechanism, the propeller hub having:

an aperture formed by a first opening at a first end of the propeller hub, a second opening at a second end of the propeller hub, and an internal surface of the propeller hub connecting the first opening to the second opening;

one or more grooves, each groove formed on the internal surface of the propeller hub, wherein each groove includes a first opening at the first end of the propeller hub and a second opening at the second end of the propeller hub; and

one or more slots, each slot formed on the first end of the propeller hub.

2. The propeller coupling assembly of claim 1, wherein the plate of the propeller locking mechanism has a toothed surface.

3. The propeller coupling assembly of claim 2 further comprising a plurality of teeth extending from the second end of the propeller hub, wherein the plurality of teeth reciprocally couple to the plate of the propeller locking mechanism.

4. The propeller coupling assembly of claim 1, wherein a plurality of propeller blades are coupled to the propeller hub.

5. The propeller coupling assembly of claim 1, wherein the grooves of the propeller hub are of sufficient size for the one or more pins of the propeller locking mechanism to pass through the grooves.

6. The propeller coupling assembly of claim 1, wherein: each of the one or more pins of the propeller locking mechanism are structured to fit into a corresponding slot of the one or more slots formed on the first end of the propeller hub;

the shaft is structured to fit in the aperture of the propeller hub; and

the plate of the propeller locking mechanism is structured to mesh with the second end of the propeller hub.

7. The propeller coupling assembly of claim 7 wherein the spring of the propeller locking mechanism is compressed beyond its equilibrium when the propeller locking mechanism and the propeller hub are coupled together.

8. The propeller coupling assembly of claim 1 wherein the propeller hub is a cylindrical shell.

9. The propeller coupling assembly of claim 1 wherein each of the one or more grooves rotate around an axis concentric with the aperture.

10. A propeller comprising:

a plurality of propeller blades; and

a propeller hub coupled to each of the propeller blades, the propeller hub having:

an aperture formed by a first opening at a first end of the propeller hub, a second opening at a second end of the propeller hub, and an internal surface of the propeller hub connecting the first opening to the second opening;

one or more grooves, each groove formed on the internal surface of the propeller hub, wherein each groove includes a first opening at the first end of the propeller hub and a second opening at the second end of the propeller hub;

one or more slots, each slot formed on the first end of the propeller hub, each of the one or more slots structured to receive a respective pin, and

a plurality of teeth extending from the second end of the propeller hub, the plurality of teeth structured to couple to a reciprocal toothed plate.

11. The propeller of claim 10, wherein the internal surface of the propeller hub is formed as an open cylinder surface that includes the one or more grooves.

12. The propeller of claim 10, wherein respective widths of the one or more grooves are the same of respective widths of the one or more slots.

13. The propeller of claim 10, wherein the internal surface of the propeller hub is structured to receive a shaft coupled to rotor.

14. The propeller of claim 10, wherein each of the one or more grooves rotate around an axis concentric with the hole.

15. The propeller of claim 10, wherein the second opening of each of the one or more grooves is directly opposite a respective one of the one or more slots.

16. A propeller locking mechanism comprising:

a shaft, the shaft coupled to a rotor;

a plate, the plate including an opening, wherein the shaft passes through the opening of the plate, and wherein the plate is structured to mesh with a propeller hub;

a spring, the spring encircling the shaft, wherein the spring is coupled to the shaft at a first end and the spring is coupled to the plate at a second end; and

one or more pins, the pins extending from the shaft.

17. The propeller locking mechanism of claim 16, wherein the plate has a toothed surface.

18. The propeller locking mechanism of claim 16, wherein the toothed surface of the plate is to mesh with a plurality of teeth extending from the second end of the propeller hub.

19. The propeller locking mechanism of claim 16, wherein:

each of the one or more pins of the propeller locking mechanism is structured to be received by a respective slot formed on the propeller hub; and

the shaft is structured to be received by an opening of the propeller hub.

20. The propeller locking mechanism of claim 16, wherein the spring of the propeller locking mechanism is structured to be compressed beyond its equilibrium when the propeller locking mechanism is coupled to the propeller hub.

* * * * *